

# Standard Gain Horn

26.5 to 40 GHz, WR28, 26 dBi Gain

## DESCRIPTION

Anteral's Standard Gain Horns are high performance antennas designed to exhibit smooth gain response in the whole band and very low VSWR. The antenna exterior appearances are designed to minimize weight, improve robustness and offer a sharp aperture. No soldering for flanges and no screws for attaching parts are included.

The SGH-26-WR28 model operates between 26.5 and 40 GHz with 26 dBi nominal mid-band gain and a typical VSWR of 1.1.




## APPLICATIONS

This type of horns is especially suitable for laboratory test measurements, electromagnetic measurements and gain calibration. Moreover, custom bands and gain values can be requested.

Anteral also offers their **Lens Horn Antennas** with plano-convex Teflon (PTFE) lenses to exhibit high gain (>30 dBi) with minimum size.

ELECTRICAL SPECIFICATIONS


Parameter	Typical value
Frequency	26.5 - 40 GHz
Directivity	26 dBi
3 dB Beamwidth, E-plane	6.67 deg
3 dB Beamwidth, H-plane	7.9 deg
Sidelobe, E-plane	-8.2 dB
Sidelobe, H-plane	-32.7 dB
S11	-25 dB

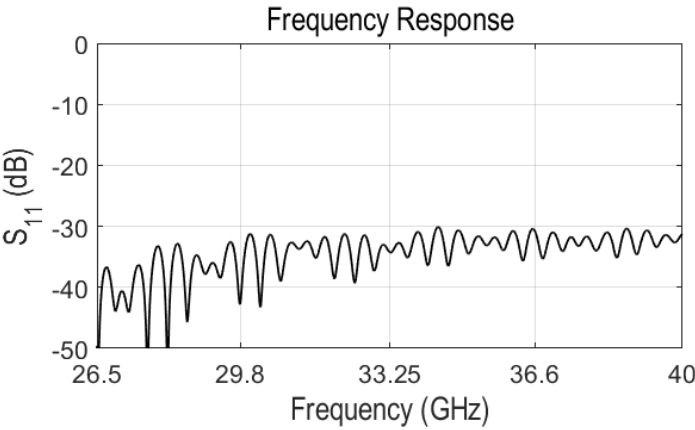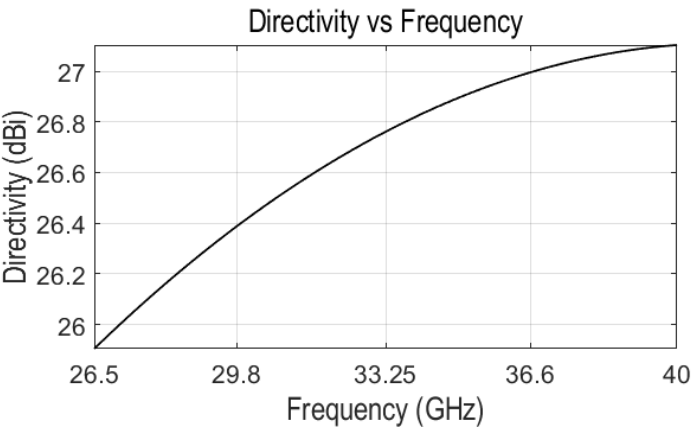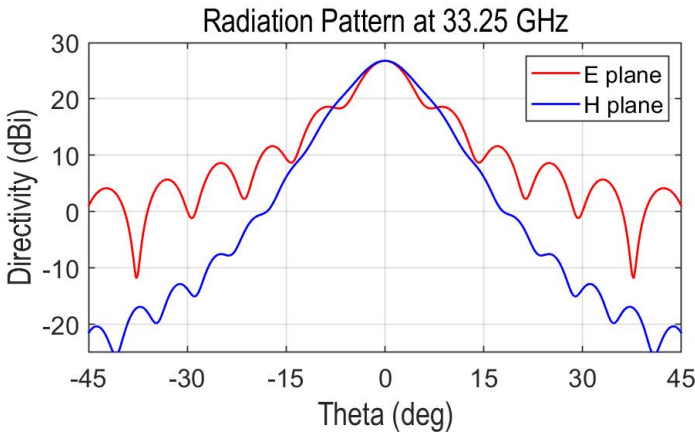

MECHANICAL SPECIFICATIONS

Parameter	Description
Antenna Port	WR-28 (7.112 mm x 3.556 mm)
Flange	UG-599/U
Length	266.9 mm
Total weight	341 g
Material	Aluminum
External Color	Ruby Red

MECHANICAL OUTLINE

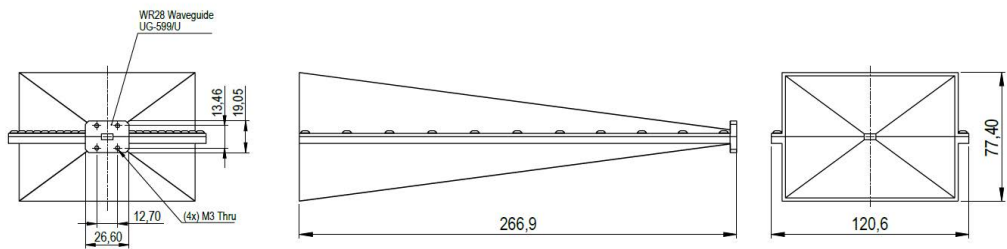

Additional notes

Directivity and radiation pattern data are simulated. Actual values could vary slightly.  
The return loss performance of all items is checked before delivery.

