

Ku-Band Lens Horn Antenna

12.4 to 18 GHz, WR62, 30 dBi Directivity

DESCRIPTION


Anteral's Lens Horn Antennas are conical horn antennas with a **plano-convex** high-density polyethylene (HDPE) lens added in the aperture, in order to apply phase correction and achieve high gain, low VSWR and low side-lobes, with minimum size.

The LHA-30-WR62 model operates at the Ku-band between 12.4 and 18 GHz with 30 dBi nominal mid-band directivity and a typical VSWR of 1.25.

APPLICATIONS




Lens Horn Antennas are especially useful when high gain is required with the minimum size. Therefore, these antennas are widely used in radar applications, communication links and meteorological systems among others.

Anteral also offers their **Focusing Lens Horn Antennas** with double-convex lenses to exhibit very well define focusing beams with short focal distances which makes them optimal for testing and material characterization.

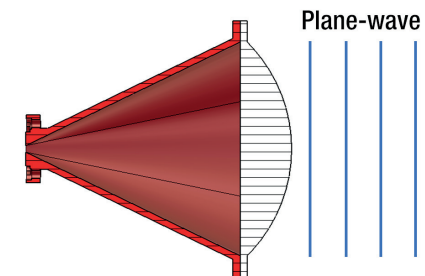

ELECTRICAL SPECIFICATIONS


Parameter	Typical value
Frequency	12.4 - 18 GHz
Directivity	31.1 dBi
3 dB Beamwidth, E-plane	4.1 deg
3 dB Beamwidth, H-plane	5.9 deg
Sidelobe, E-plane	-17 dB
Sidelobe, H-plane	-28 dB
S11	-18 dB

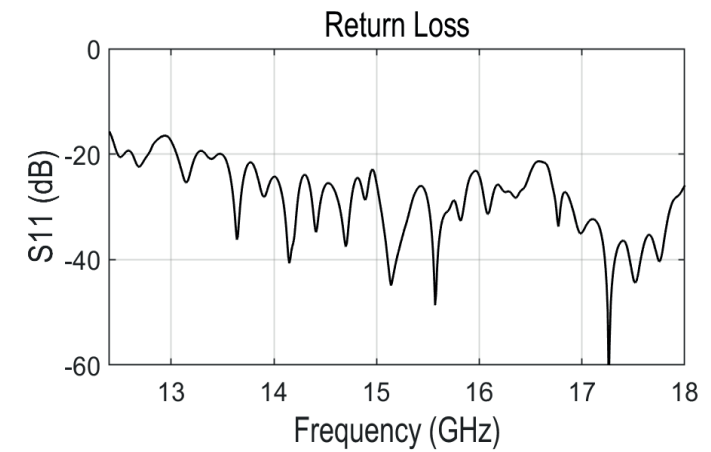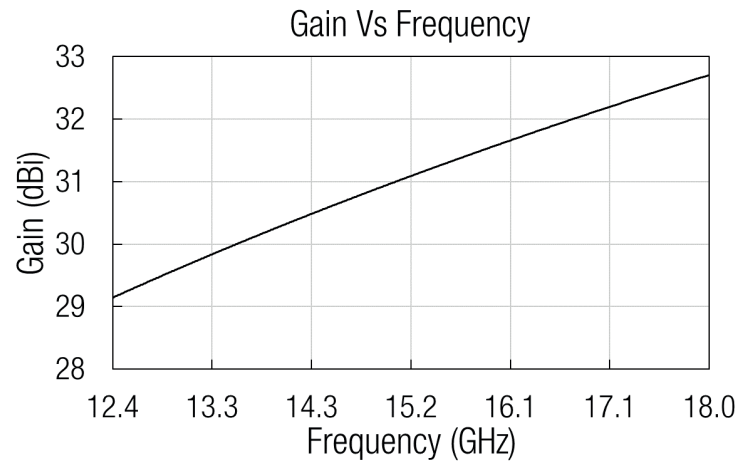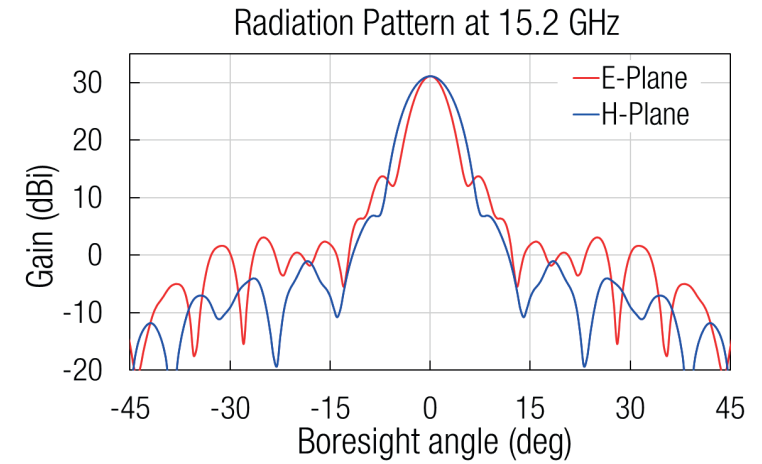


MECHANICAL SPECIFICATIONS

Parameter	Description
Antenna Port*	WR-62 (15.799 mm x 7.899 mm)
Flange	UBR 140
Volume	272 x 282 x 329 mm
Total weight	3600 g
Horn Material	Aluminum
Lens Material	HDPE
External Color	Ruby Red
Surface treatment for antenna	Surtec 650
Surface treatment for bracket	Black anodized

*The antenna includes a rectangular to circular waveguide transition (WR-62 to WC-136)

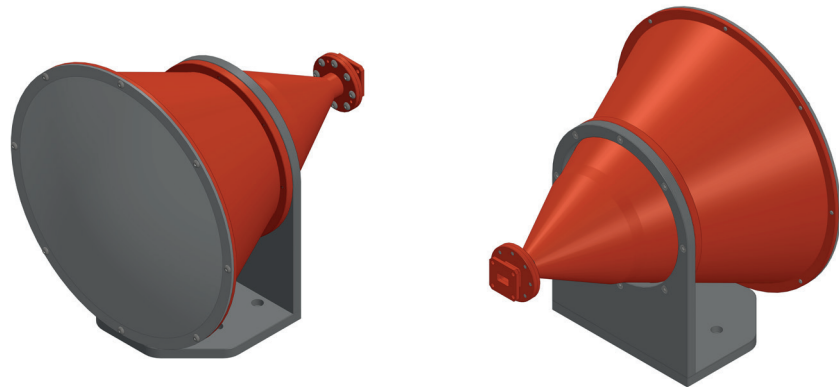

MECHANICAL OUTLINE

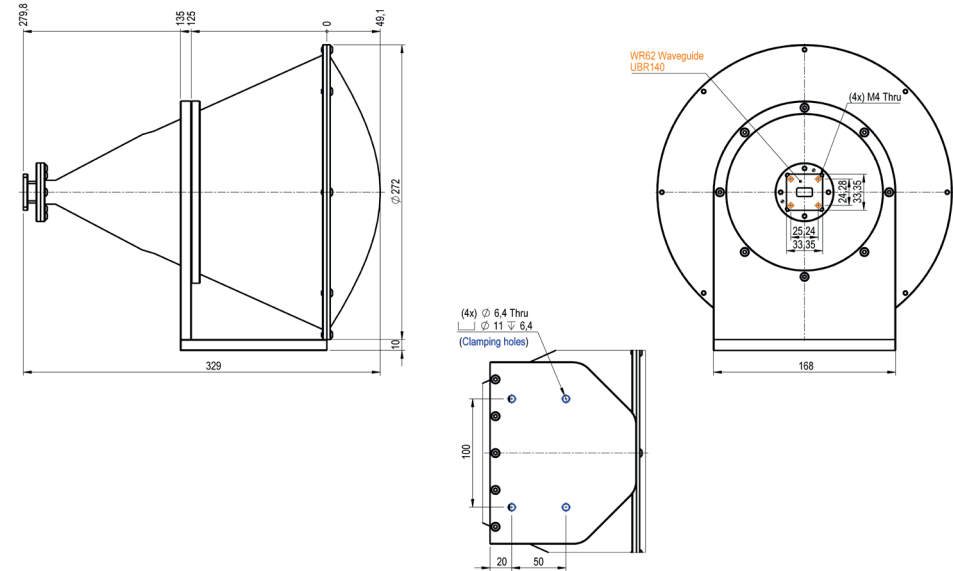

Additional notes

Actual values have been checked experimentally but they could vary slightly. Return loss and radiation pattern data are measured from a sample.

The return loss performance of all items is checked before delivery.
Last version: 07/05/2026

