

# G-Band Standard Gain Horn

140 to 220 GHz, WR05, 26 dBi Gain

## DESCRIPTION

Anteral's Standard Gain Horns are high performance antennas designed to exhibit smooth gain response in the whole band and very low VSWR. The antenna exterior appearances are designed to minimize weight, improve robustness and offer a sharp aperture. They are manufactured from a single aluminum rod. No soldering for flanges and no screws for attaching parts are included.

The SGH-26-WR05 model operates at the G-band between 140 and 220 GHz with 26 dBi nominal mid-band gain and a typical VSWR of 1.12.




## APPLICATIONS

This type of horns is especially suitable for laboratory test measurements, electromagnetic measurements and gain calibration. Moreover, custom bands and gain values can be requested.

Anteral also offers their **Lens Horn Antennas** with plano-convex Teflon (PTFE) lenses to exhibit high gain (>30 dBi) with minimum size.

### ELECTRICAL SPECIFICATIONS


Parameter	Minimum	Typical	Maximum
Frequency	140 GHz	180 GHz	220 GHz
Directivity	25 dBi	26 dBi	27 dBi
3 dB Beamwidth, E-plane		7.7 deg	
3 dB Beamwidth, H-plane		8.5 deg	
Sidelobe, E-plane		-10 dB	-9 dB
Sidelobe, H-plane		-33 dB	-30 dB
S11		-25 dB	-20 dB

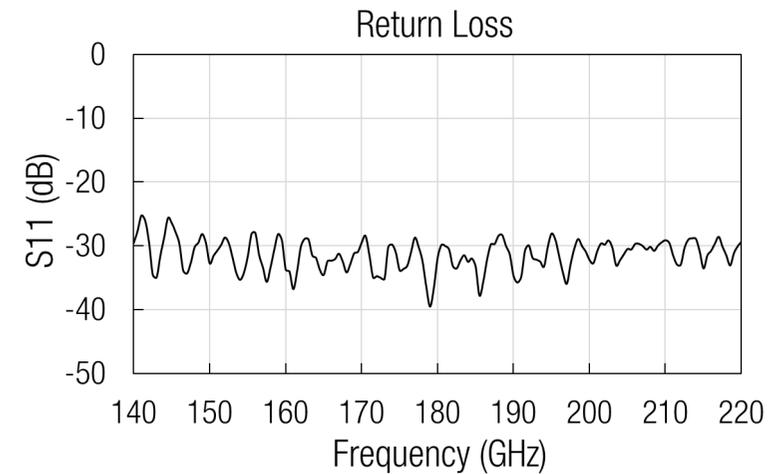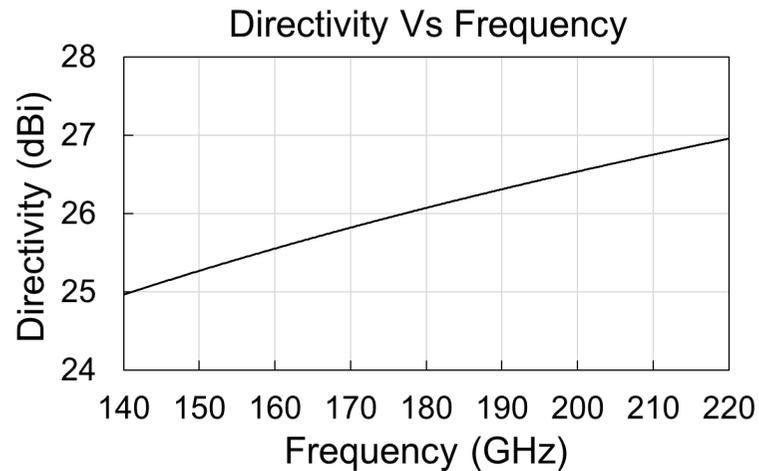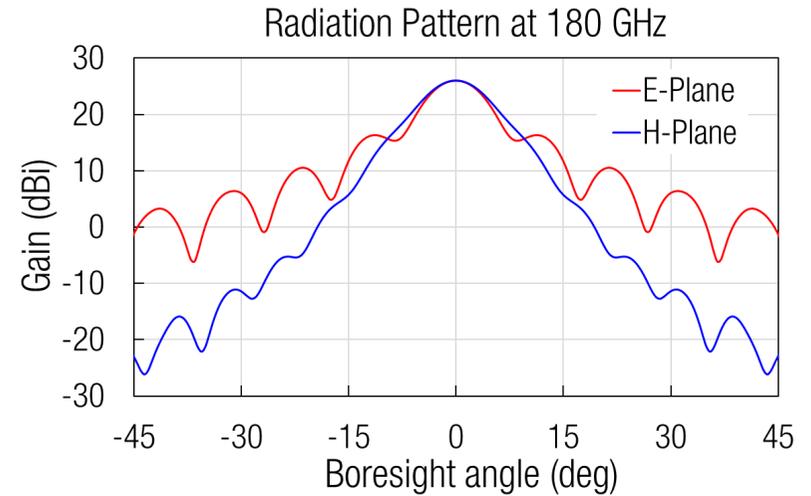

### MECHANICAL SPECIFICATIONS

Parameter	Description
Antenna Port	WR-5.1 (1.295 mm x 0.6475 mm)
Flange	UG-387/U
Length	40.8 mm
Total weight	11 g
Material	Aluminum
External Color	Ruby Red

### MECHANICAL OUTLINE

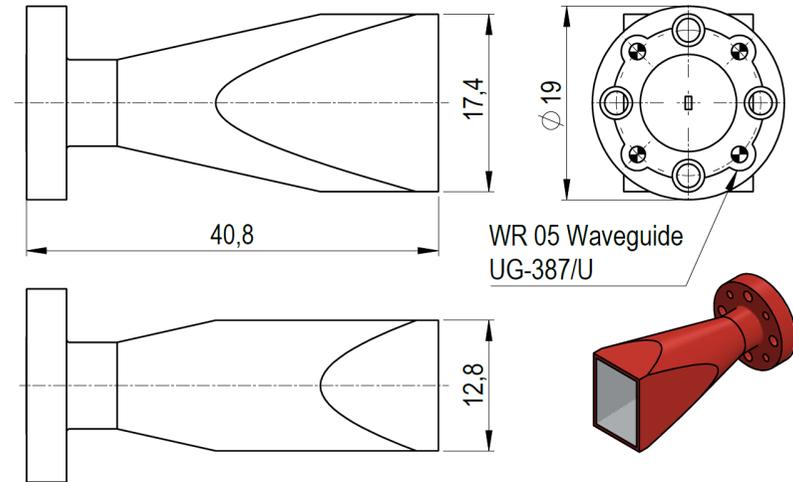

### Additional notes

Directivity and radiation pattern data are simulated. Actual values have been checked experimentally but they could vary slightly.

Return loss data are measured from a sample.

The return loss performance of all items is checked before delivery to fulfill specifications.