

E-Band Standard Gain Horn

60 to 90 GHz, WR12, 26 dBi Gain

DESCRIPTION

Anteral's Standard Gain Horns are high performance antennas designed to exhibit smooth gain response in the whole band and very low VSWR. The antenna exterior appearances are designed to minimize weight, improve robustness and offer a sharp aperture. They are manufactured from a single aluminum rod. No soldering for flanges and no screws for attaching parts are included.

The SGH-26-WR12 model operates at the E-band between 60 and 90 GHz with 26 dBi nominal mid-band gain and a typical VSWR of 1.06.




APPLICATIONS

This type of horns is especially suitable for laboratory test measurements, electromagnetic measurements and gain calibration. Moreover, custom bands and gain values can be requested.

Anteral also offers their **Lens Horn Antennas** with plano-convex Teflon (PTFE) lenses to exhibit high gain (>30 dBi) with minimum size.

ELECTRICAL SPECIFICATIONS


Parameter	Minimum	Typical	Maximum
Frequency	60 GHz	75 GHz	90 GHz
Directivity	25 dBi	26 dBi	27 dBi
3 dB Beamwidth, E-plane		7.7 deg	
3 dB Beamwidth, H-plane		8.5 deg	
Sidelobe, E-plane		-10 dB	-9 dB
Sidelobe, H-plane		-33 dB	-30 dB
S11		-30 dB	-25 dB

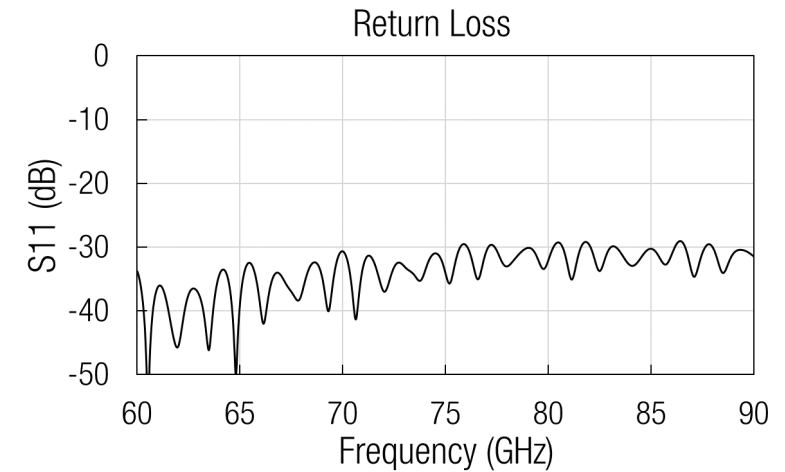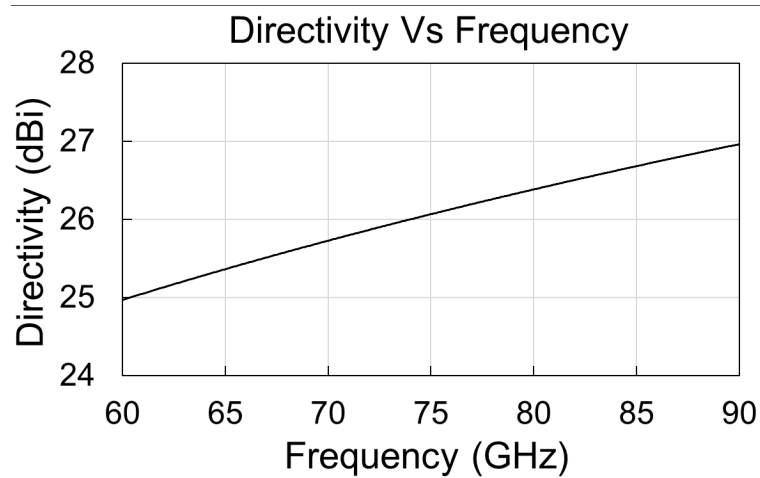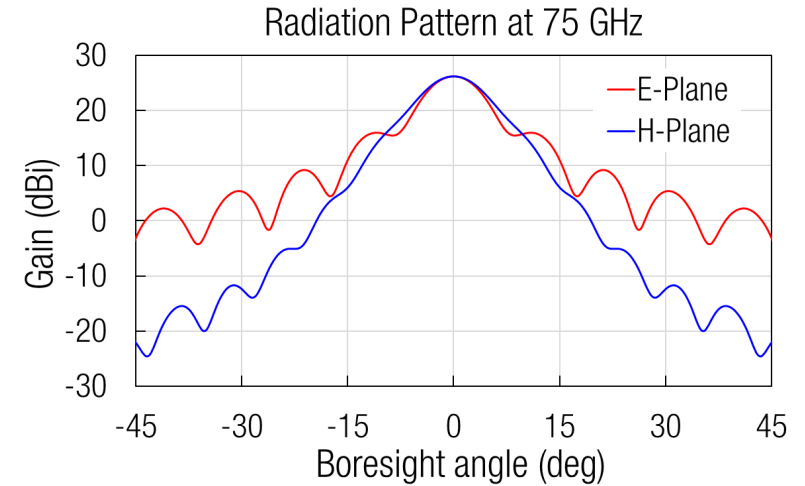

MECHANICAL SPECIFICATIONS

Parameter	Description
Antenna Port	WR-12 (3.099 mm x 1.549 mm)
Flange	UG-387/U
Length	97.6 mm
Total weight	61 g
Material	Aluminum
External Color	Ruby Red

MECHANICAL OUTLINE

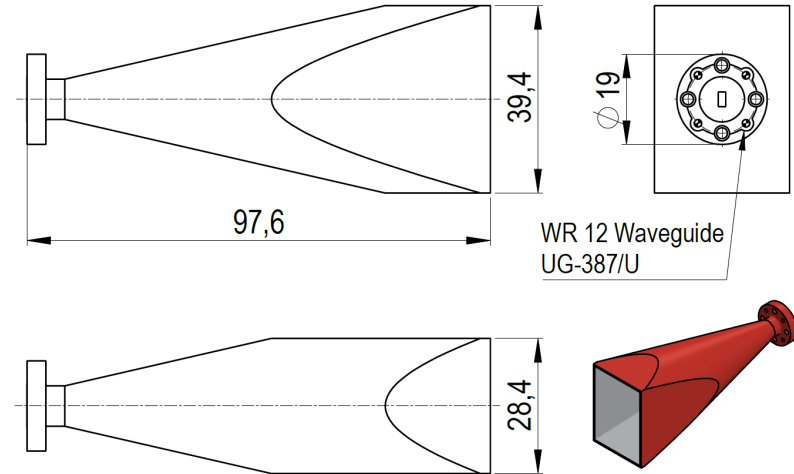

Additional notes

Directivity and radiation pattern data are simulated. Actual values have been checked experimentally but they could vary slightly.

Return loss data are measured from a sample.

The return loss performance of all items is checked before delivery to fulfill specifications.